

SLP020S-12

High Efficiency Monocrystalline PV Module

Electrical Characteristics	SLP020S-12
Product code	020021201
Maximum power (Pmax)	20W
Voltage at Pmax (Vmp)	17.2V
Current at Pmax (Imp)	1.16A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	1.31A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

*NOCT: Nominal operating cell temperature (the data is only for reference)





Module Diagram


Dimensions in brackets are in inches.

Un-bracketed dimensions are in millimeters.

Unit: mm[in.]

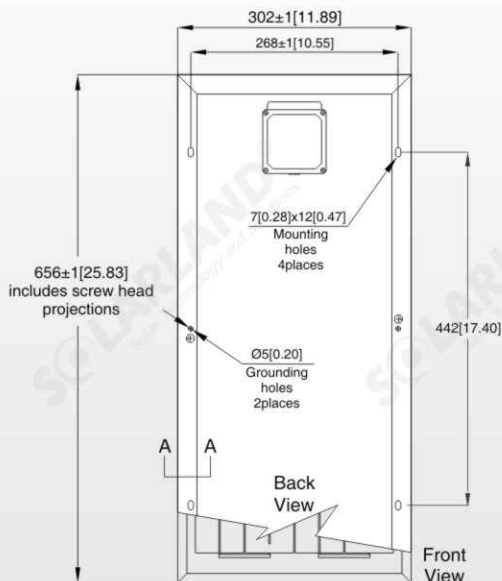

Junction Box
Top View(Lid Open)




Section A-A

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

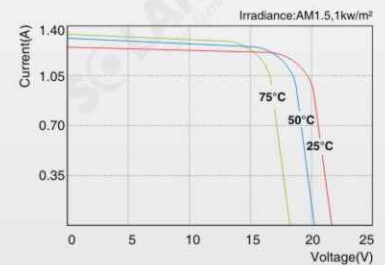

SLP020S-12 I-V Curves

Specifications

SLP020S-12

Specifications	SLP020S-12
Cells	Monocrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module dimension	656mm[25.83in.]x302mm[11.89in.]x30mm[1.18in.]
Weight	2.6kg[5.73lbs]
Packing information(Carton)	670mm[26.38in.]x195mm[7.68in.]x320mm[12.60in.]/(5pcs/ctn)

*Limited warranty: 2-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.