

SLP075/080-12

High Efficiency Multicrystalline PV Module




Electrical Characteristics	SLP075-12	SLP080-12
Product code	075011204	080011205A
Maximum power (Pmax)	75W	80W
Voltage at Pmax (Vmp)	17.2V	17.2V
Current at Pmax (Imp)	4.36A	4.65A
Open-circuit voltage (Voc)	21.6V	21.6V
Short-circuit current (Isc)	4.85A	5.17A
Temperature coefficient of Voc	-(80±10)mV/°C	
Temperature coefficient of Isc	(0.065±0.015)%/°C	
Temperature coefficient of power	-(0.5±0.05)%/°C	
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C	
Operating temperature	-40°C to 85°C	
Maximum system voltage	1000V DC	
Power tolerance	± 5%	


*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

*NOCT: Nominal operating cell temperature (the data is only for reference)

Module Diagram

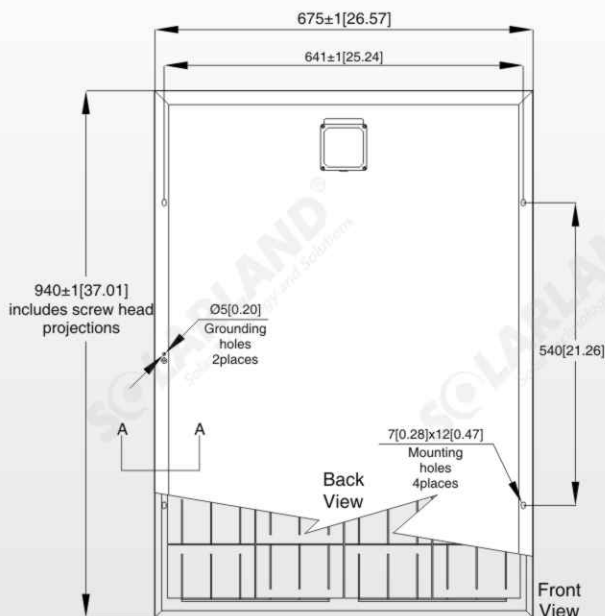

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit: mm[in.]



Junction Box
Top View (Lid Open)




Section A-A

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

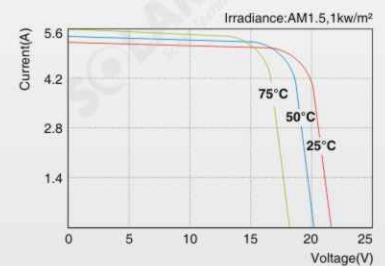

SLP080-12 I-V Curves

Specifications

SLP075/080-12

Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module dimension	940mm[37.01in.]x675mm[26.57in.]x30mm[1.18in.]
Weight	8.00kg[17.64lbs]
Packing information(Carton)	980mm[38.58in.]x715mm[28.15in.]x80mm[3.15in.]/(2pcs/ctn)

*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.